Fig. 1

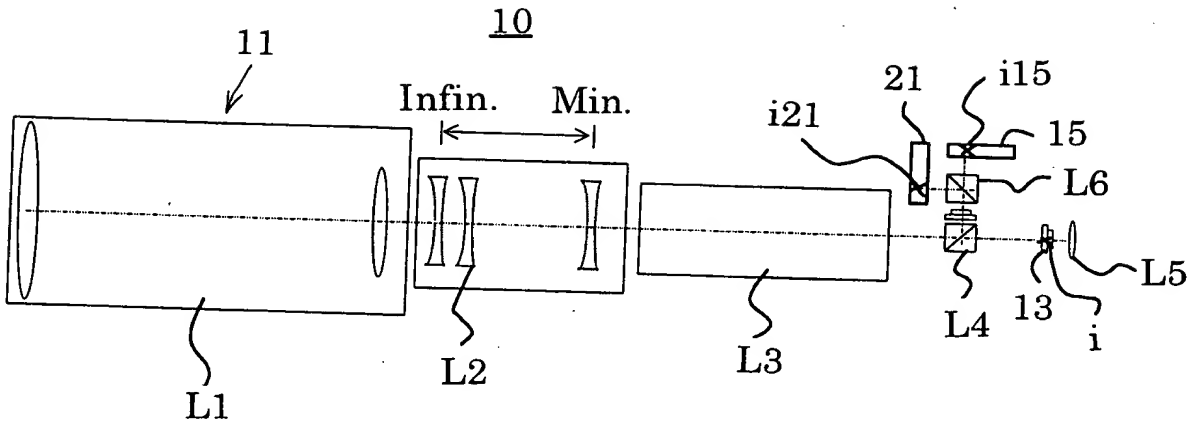

Fig. 2A

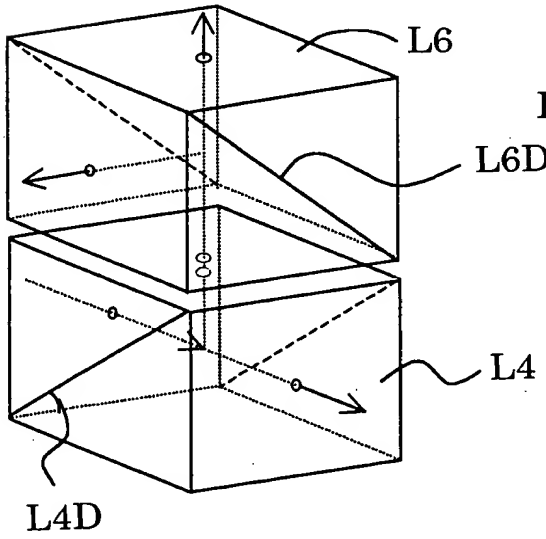

Fig. 2B

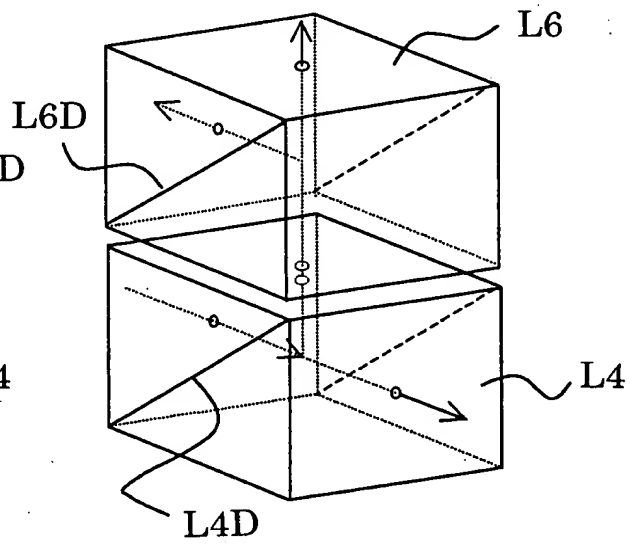

T060270 "ET000660

Fig.3

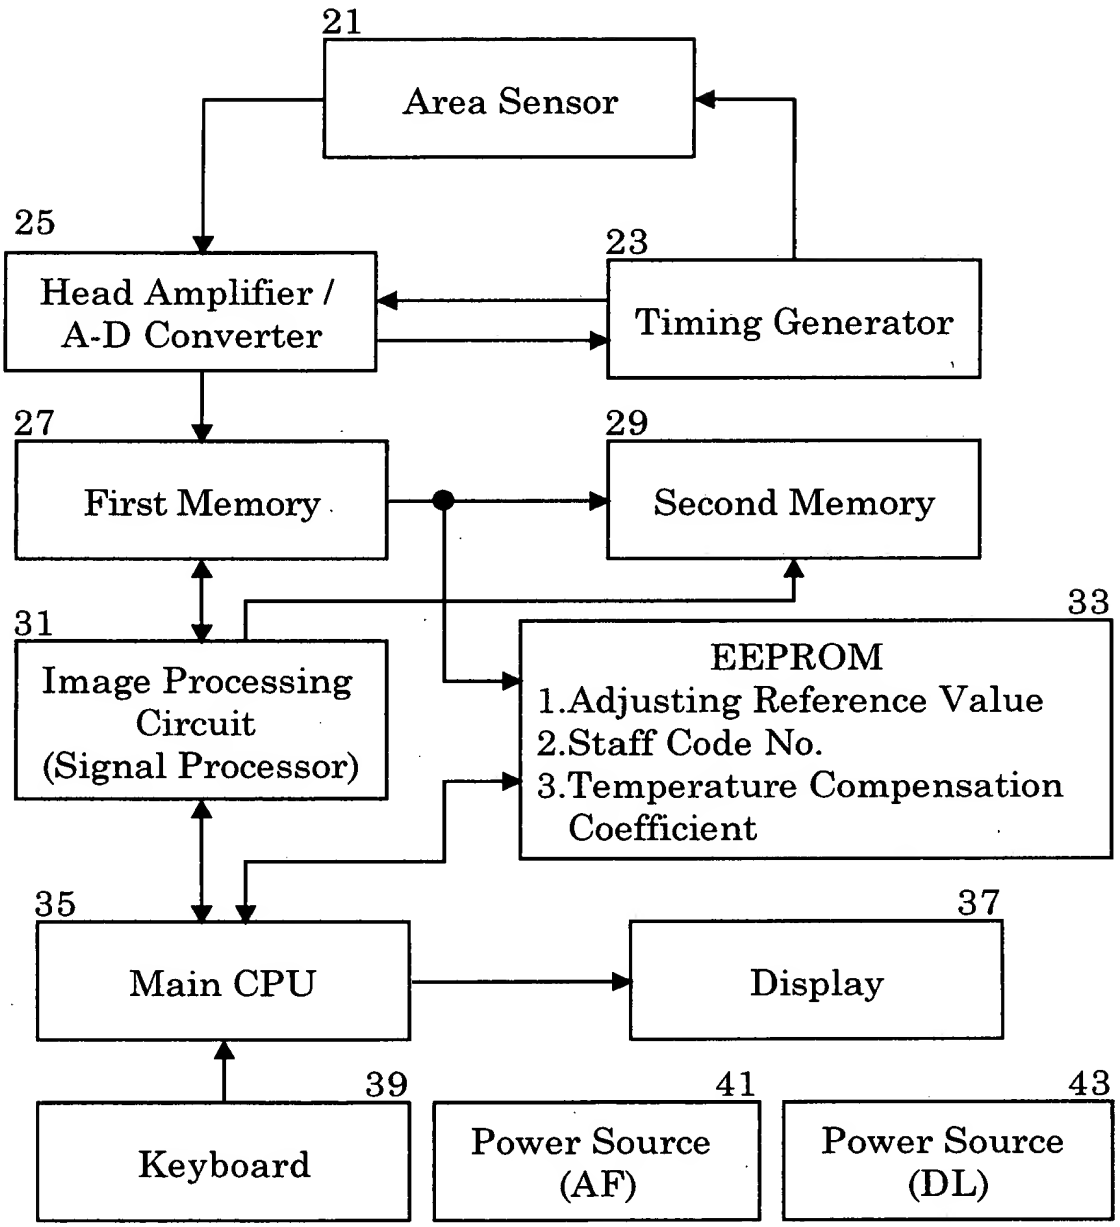
21
Area Sensor
25
Head Amplifier / A-D Converter
23
Timing Generator
27
First Memory
29
Second Memory
31
Image Processing Circuit (Signal Processor)
33
EEPROM
1.Adjusting Reference Value
2.Staff Code No.
3.Temperature Compensation Coefficient
35
Main CPU
37
Display
39
Keyboard
41
Power Source (AF)
43
Power Source (DL)

Fig. 4

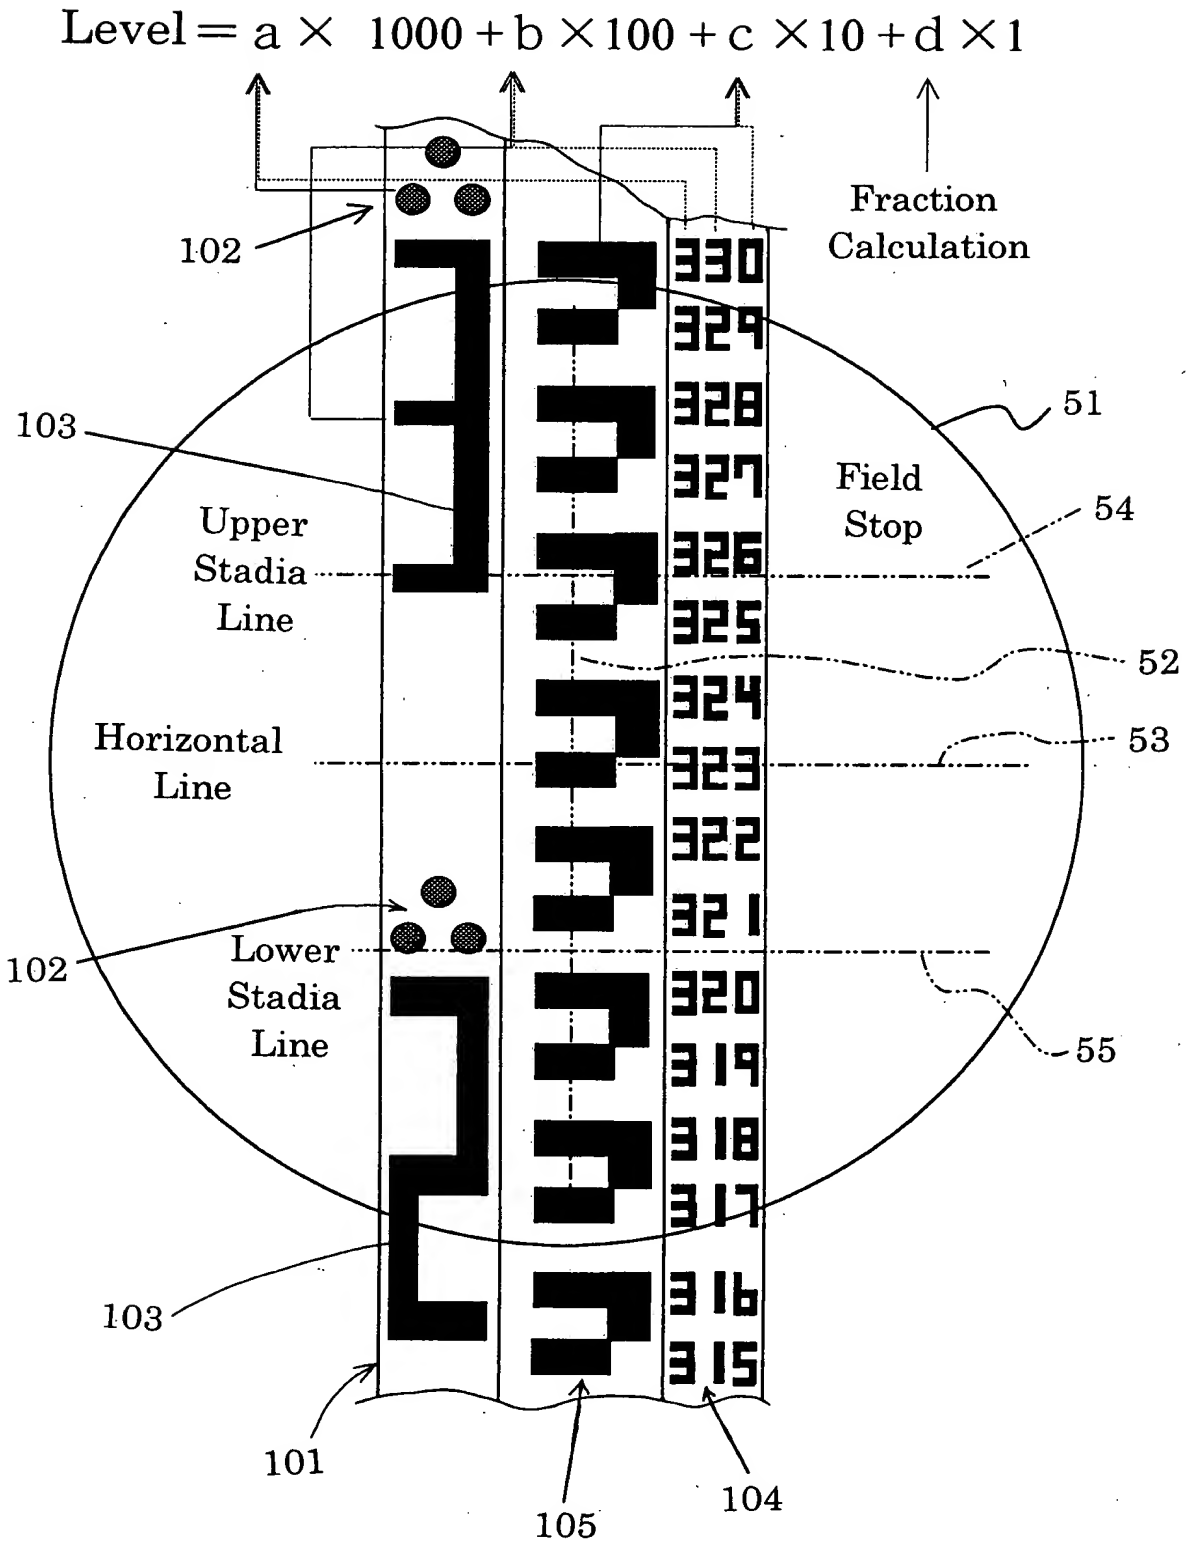
Level = a × 1000 + b × 100 + c × 10 + d × 1
Fraction Calculation
102
103
Upper Stadia Line
Horizontal Line
Lower Stadia Line
102
103
101
105
104
51
Field Stop
54
52
53
55
330
329
328
327
326
325
324
323
322
321
320
319
318
317
316
315

EP0600660

Fig. 5

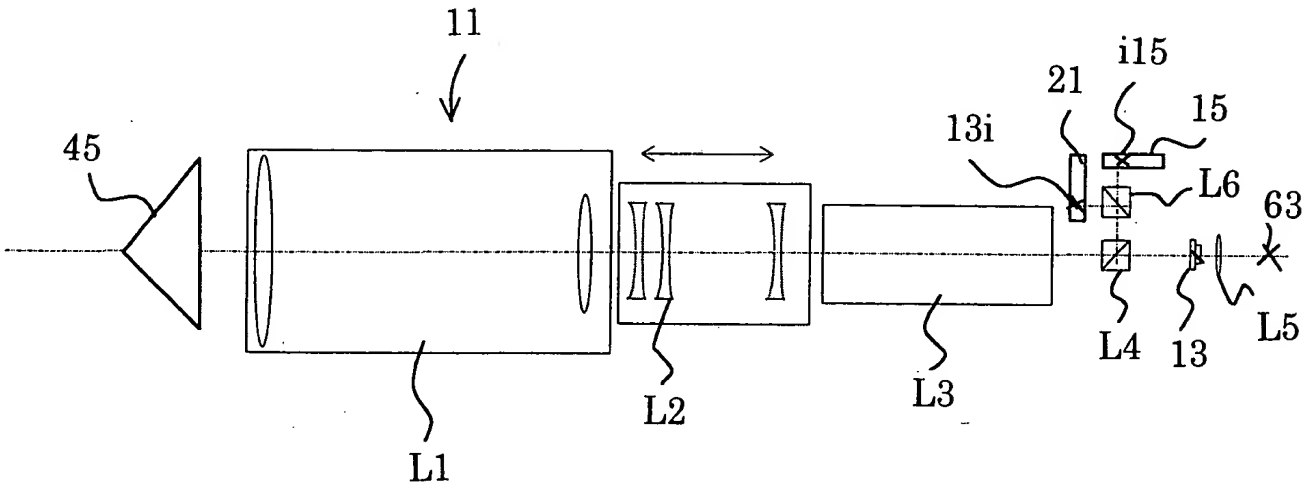

Fig.6A

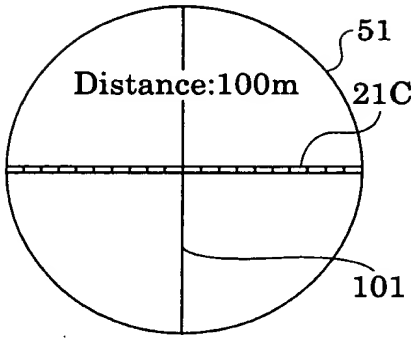

Fig.6B

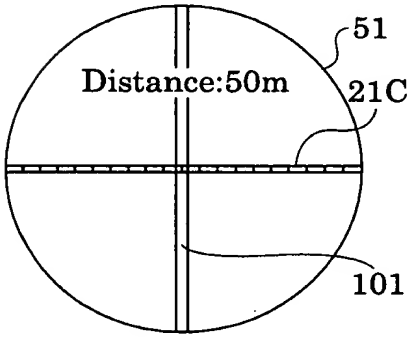

Fig.6C

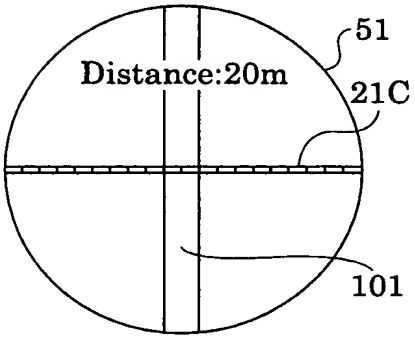

Fig.6D

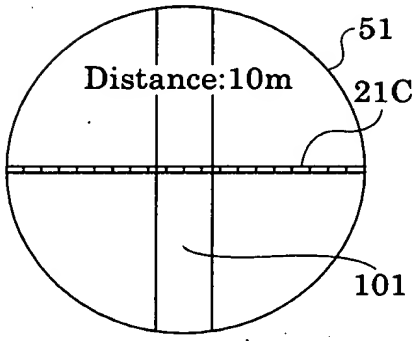

Fig.6E

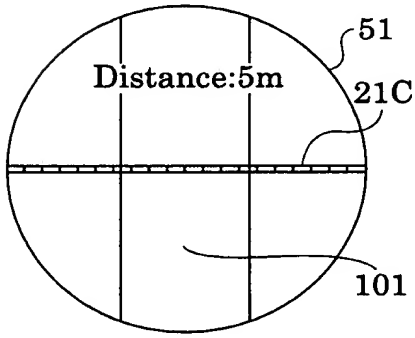

Fig.6F

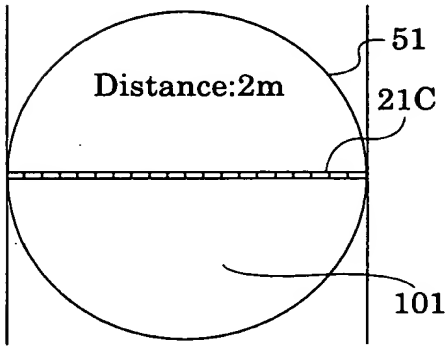

EP 0 607 560 A1

Fig. 7

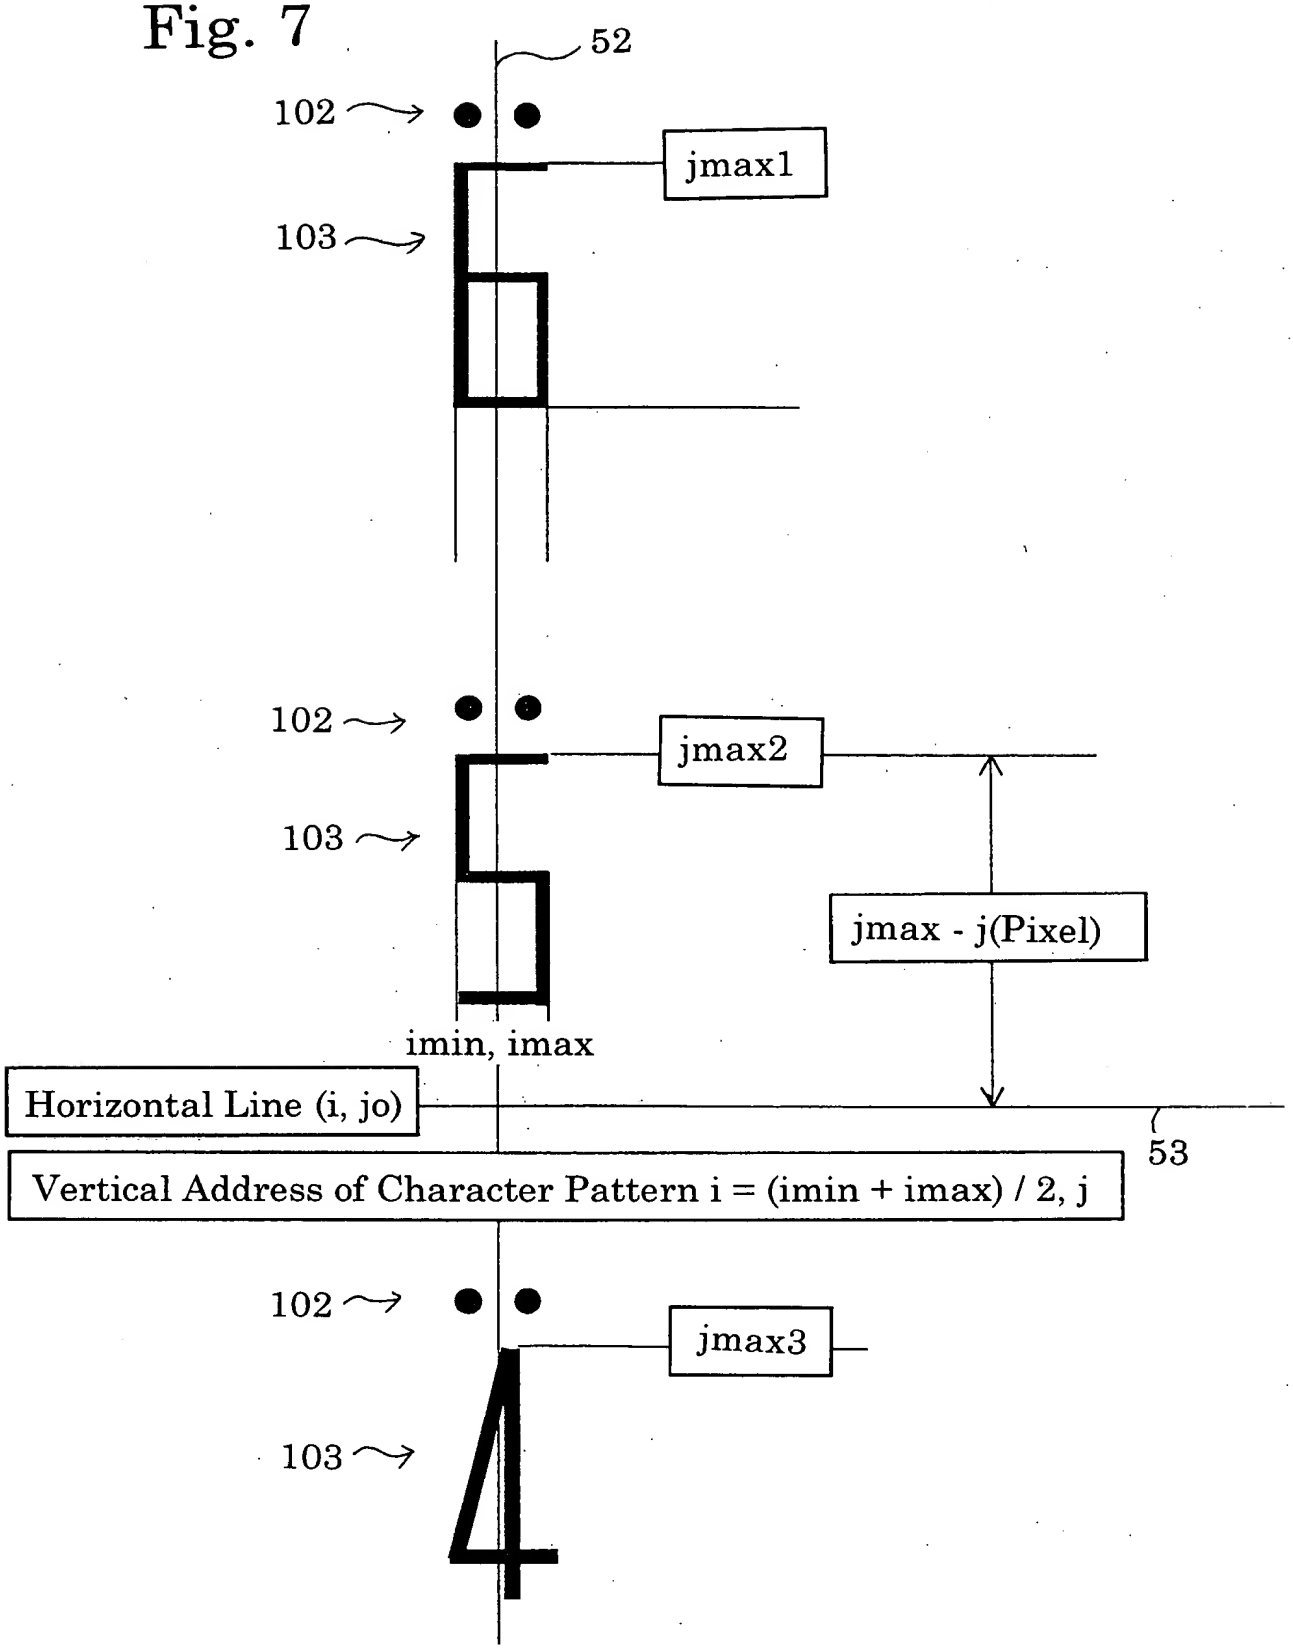

EP0607003A1 940720

Fig. 8

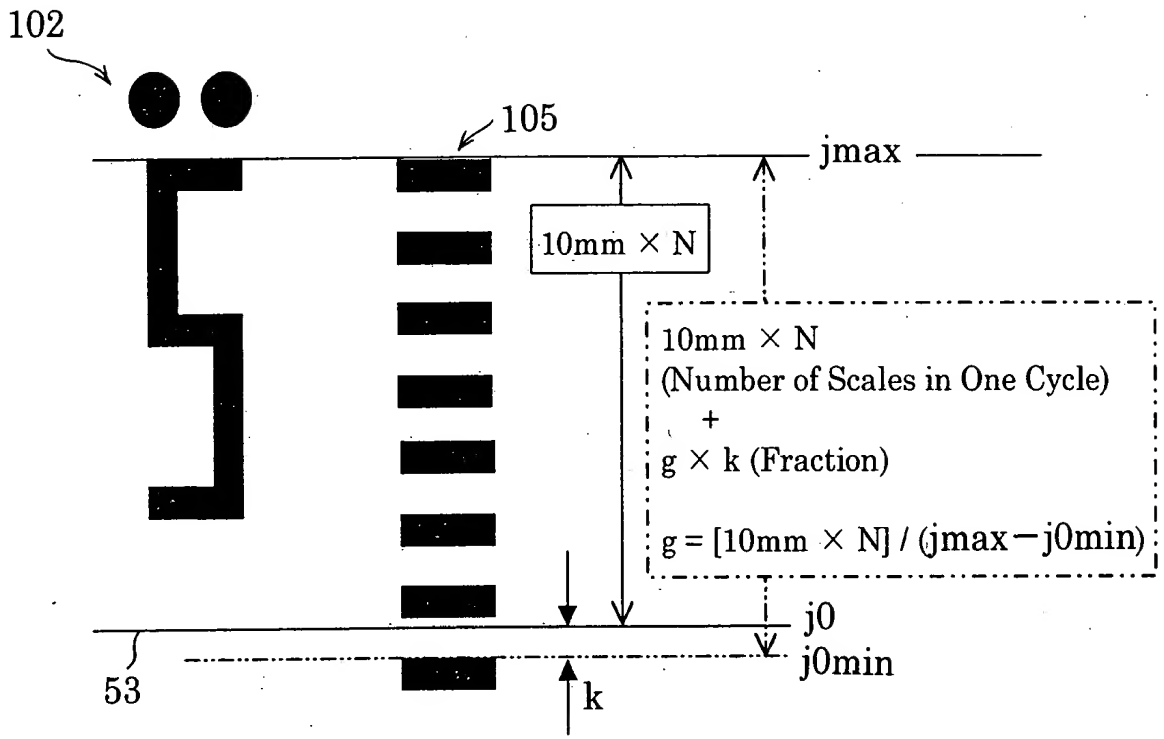
102
105
jmax
10mm × N
10mm × N
(Number of Scales in One Cycle)
+
g × k (Fraction)
g = [10mm × N] / (jmax − j0min)
j0
j0min
53
k

EP 0 760 470 A1

Fig.9A

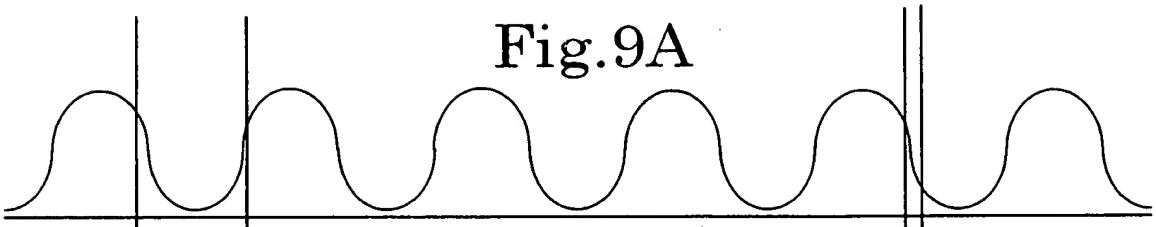

Minimum Graduation Read Signal

Fig.9B

CCD Line Sensor

Fig.9C

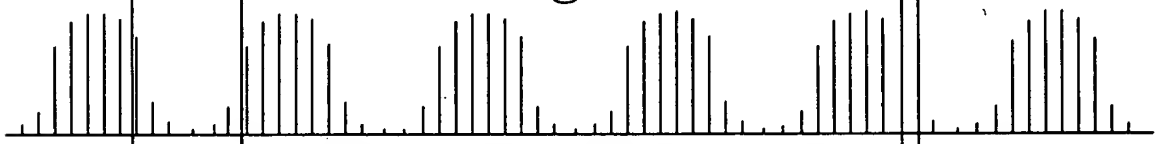

CCD Line Sensor Sampling Signal

Fig.9D

Square Process of Reproduction Signal

Fig.9E

Reference Stadia Distance and
Extension Stadia Distance

Fig.9F

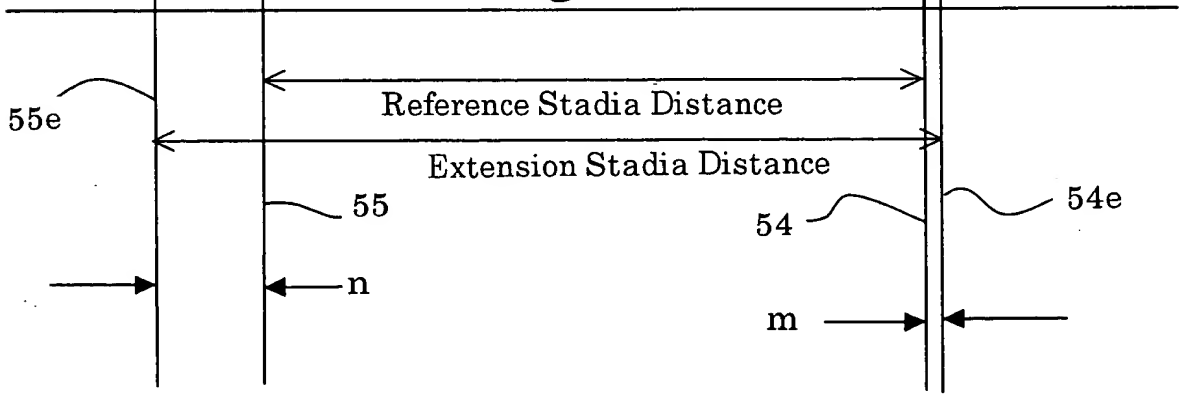

Fig.10A

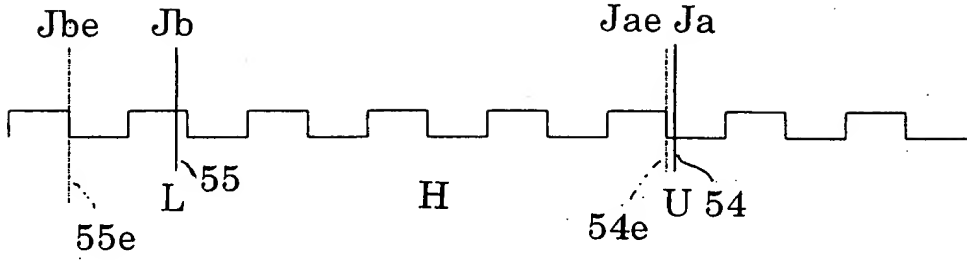

Fig.10B

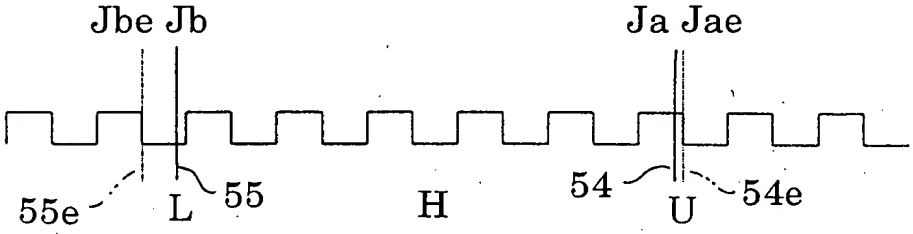

Fig.10C

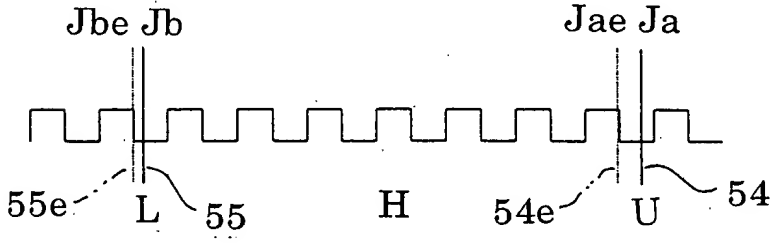

Fig.10D

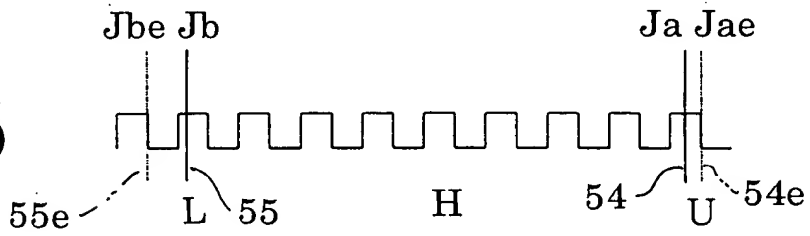

EP0607069A1

Fig.11

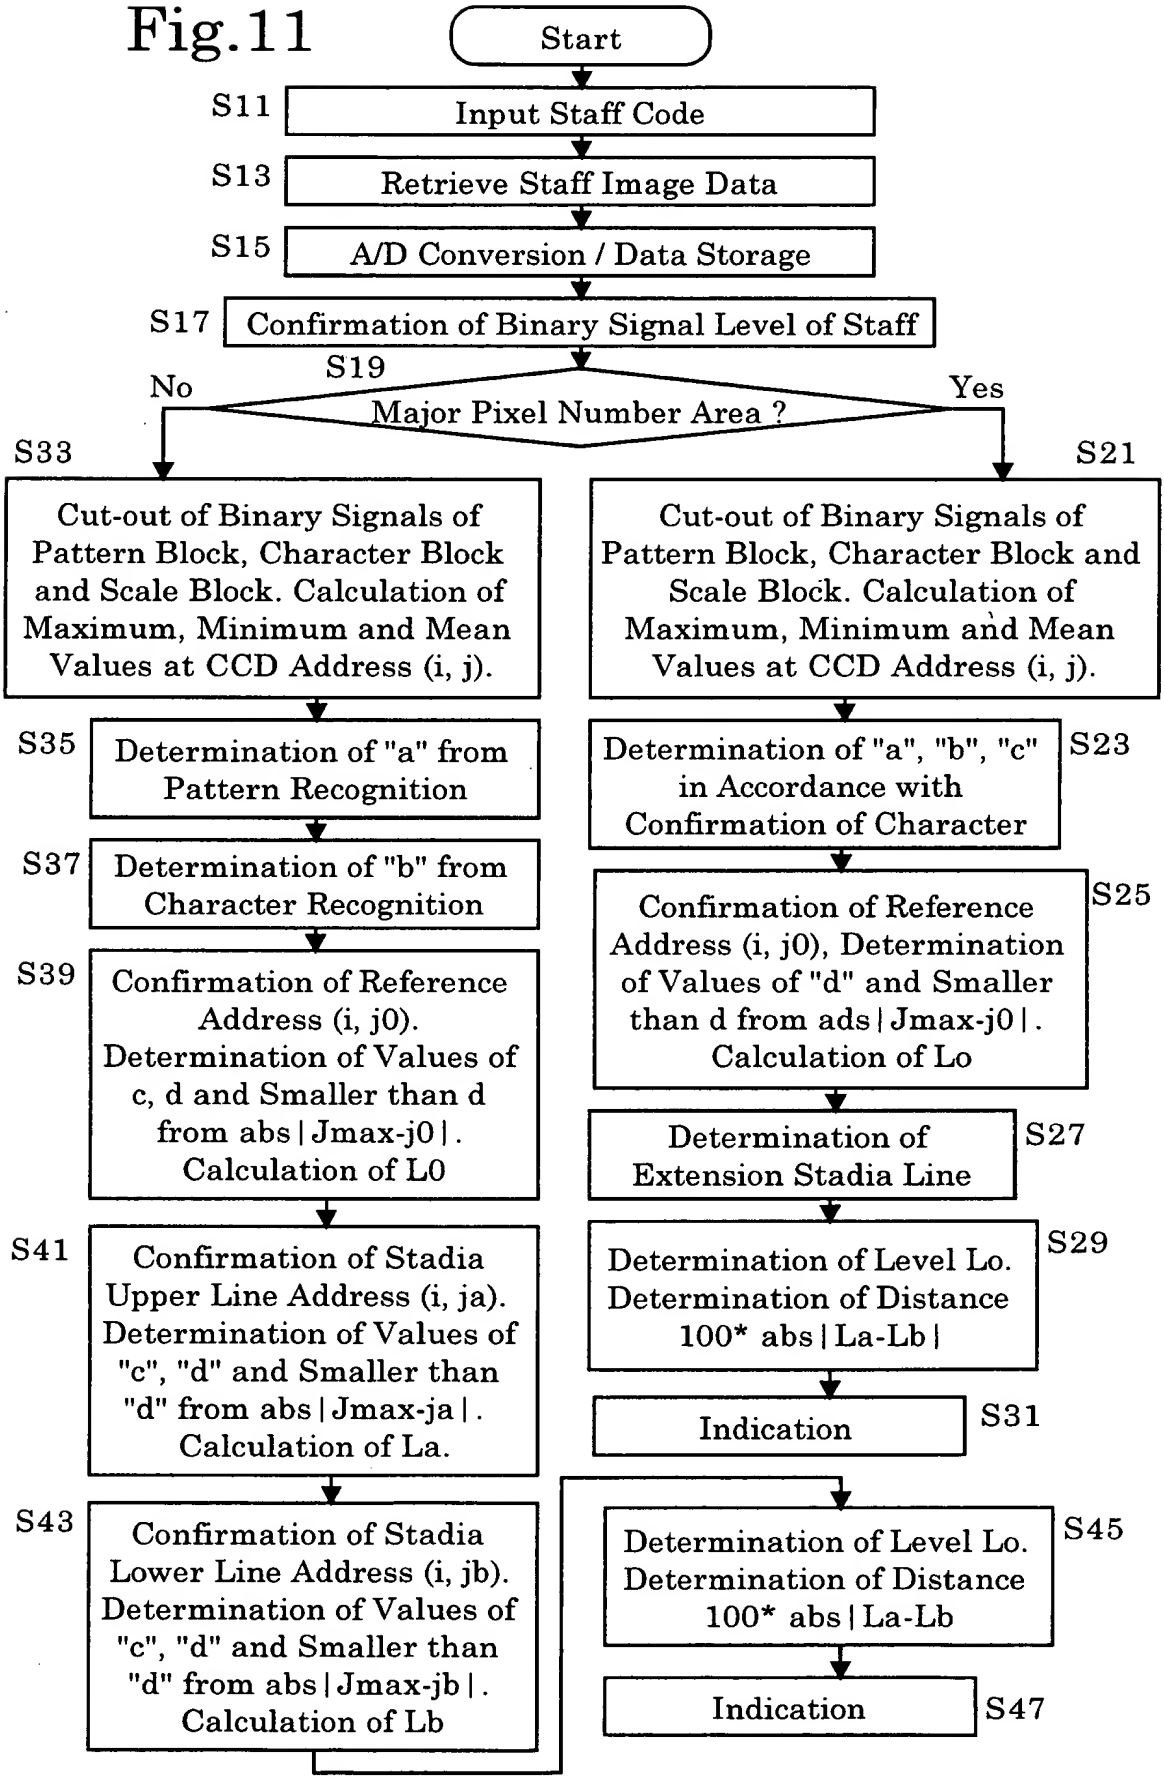
Start
S11
Input Staff Code
S13
Retrieve Staff Image Data
S15
A/D Conversion / Data Storage
S17
Confirmation of Binary Signal Level of Staff
S19
No
Major Pixel Number Area ?
Yes
S33
Cut-out of Binary Signals of Pattern Block, Character Block and Scale Block. Calculation of Maximum, Minimum and Mean Values at CCD Address (i, j).
S35
Determination of "a" from Pattern Recognition
S37
Determination of "b" from Character Recognition
S39
Confirmation of Reference Address (i, j0). Determination of Values of c, d and Smaller than d from abs | Jmax-j0 | . Calculation of L0
S41
Confirmation of Stadia Upper Line Address (i, ja). Determination of Values of "c", "d" and Smaller than "d" from abs | Jmax-ja | . Calculation of La.
S43
Confirmation of Stadia Lower Line Address (i, jb). Determination of Values of "c", "d" and Smaller than "d" from abs | Jmax-jb | . Calculation of Lb
S21
Cut-out of Binary Signals of Pattern Block, Character Block and Scale Block. Calculation of Maximum, Minimum and Mean Values at CCD Address (i, j).
S23
Determination of "a", "b", "c" in Accordance with Confirmation of Character
S25
Confirmation of Reference Address (i, j0), Determination of Values of "d" and Smaller than d from ads | Jmax-j0 | . Calculation of Lo
S27
Determination of Extension Stadia Line
S29
Determination of Level Lo. Determination of Distance 100* abs | La-Lb |
S31
Indication
S45
Determination of Level Lo. Determination of Distance 100* abs | La-Lb
S47
Indication

Fig. 12

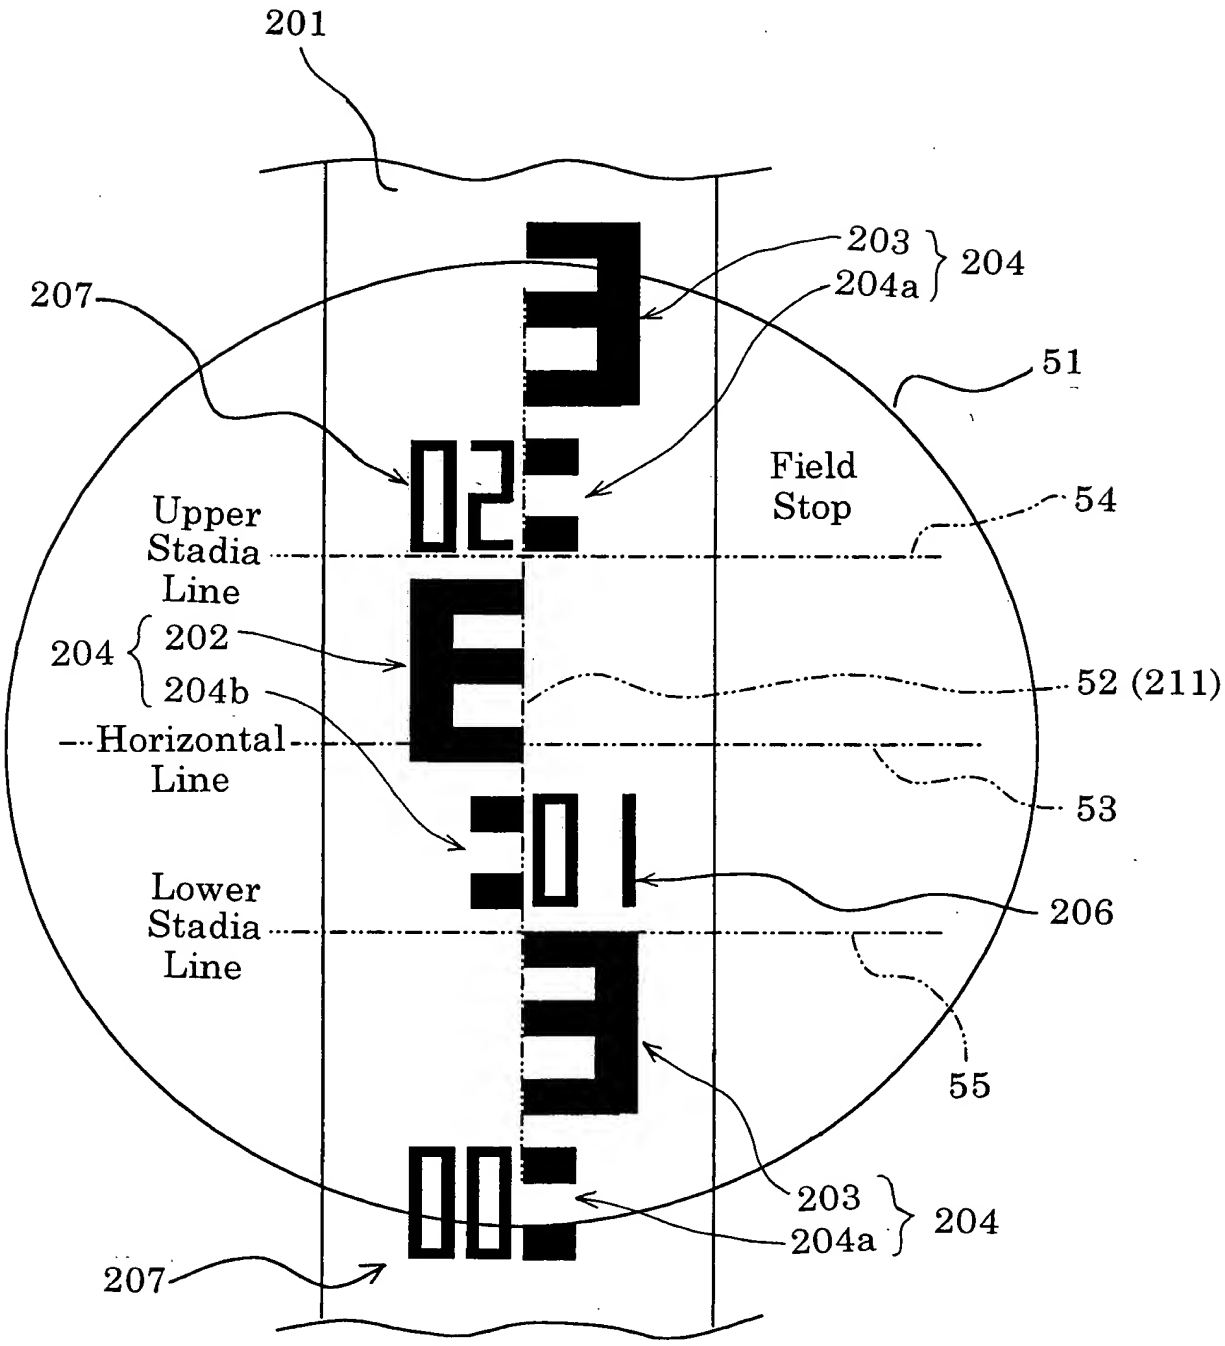
201
203
204a
204
207
51
Field
Stop
54
Upper
Stadia
Line
204
202
204b
52 (211)
Horizontal
Line
53
Lower
Stadia
Line
206
55
203
204a
204
207

Fig. 13

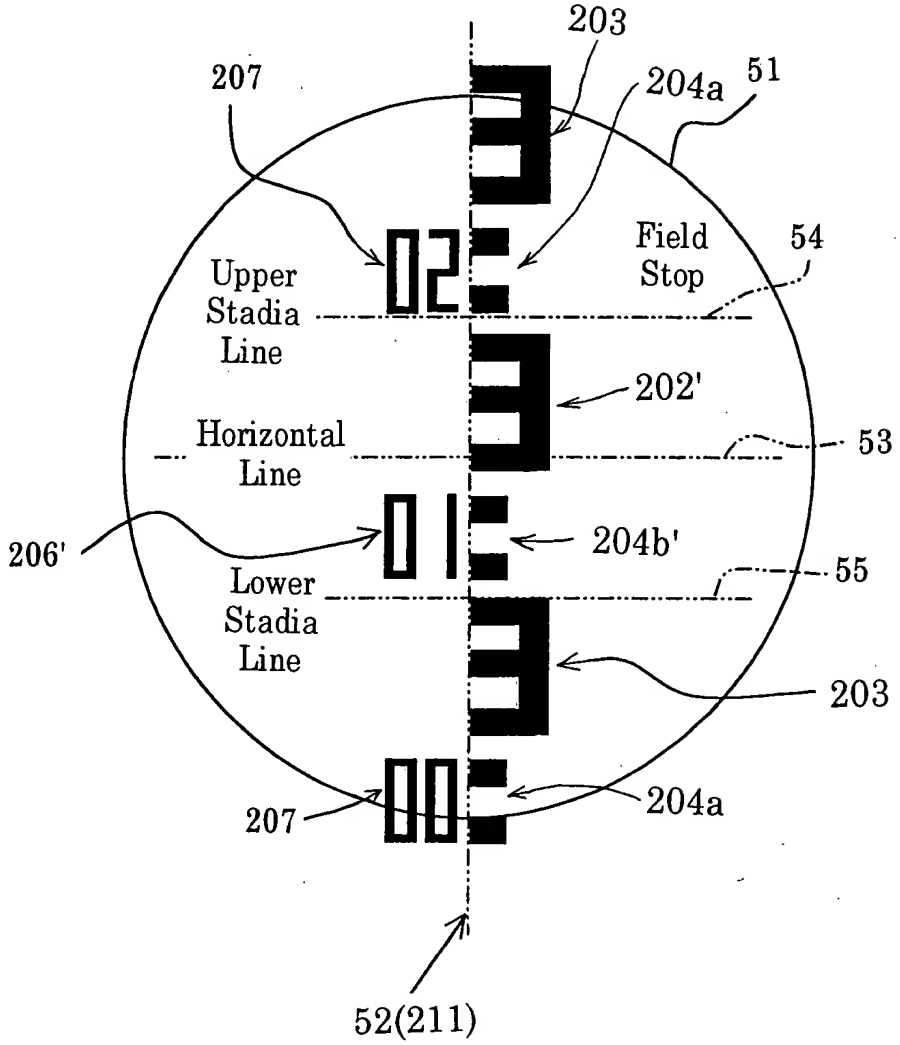
203
207
204a
51
Field
Stop
54
Upper
Stadia
Line
202'
Horizontal
Line
53
206'
204b'
55
Lower
Stadia
Line
203
207
204a
52(211)

Fig.14

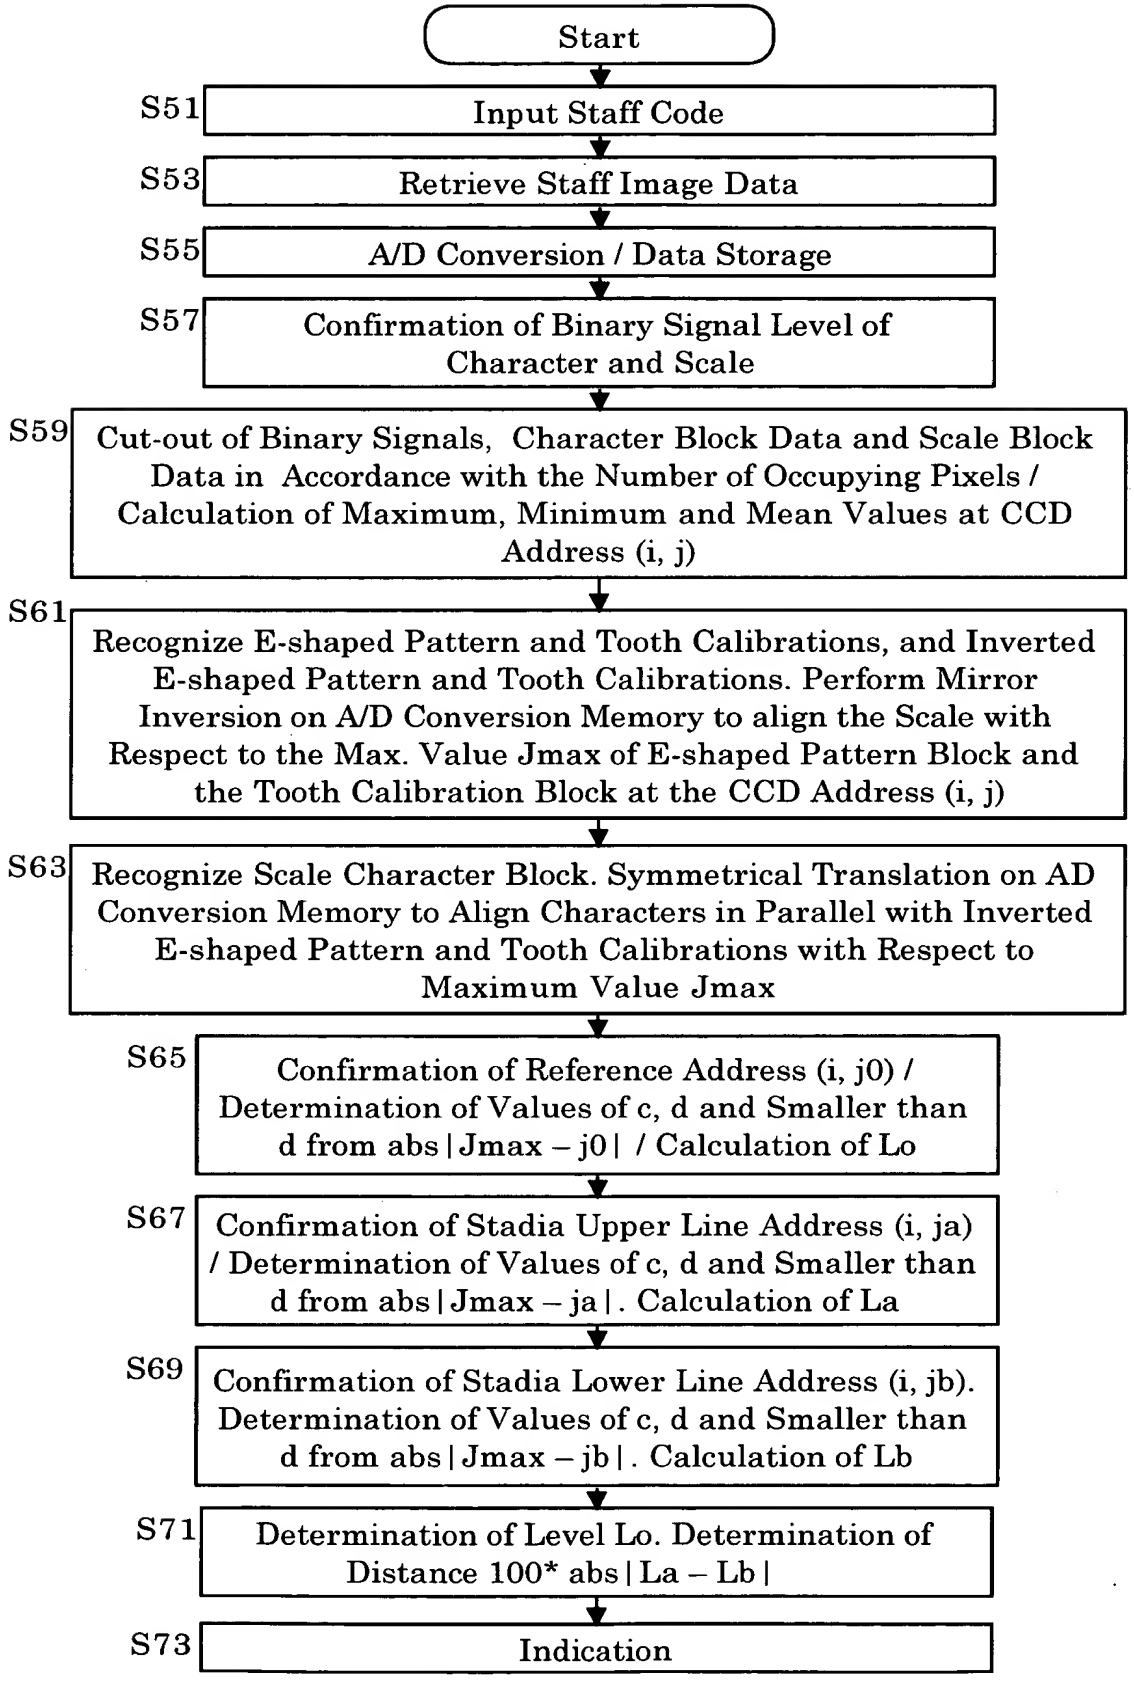

EP0707413A2

Fig. 1

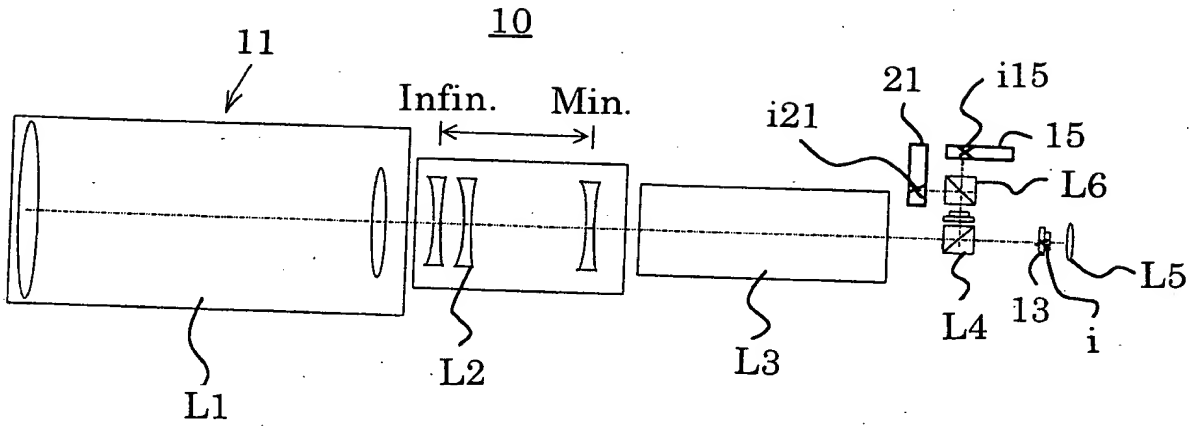

Fig. 2A (2B)

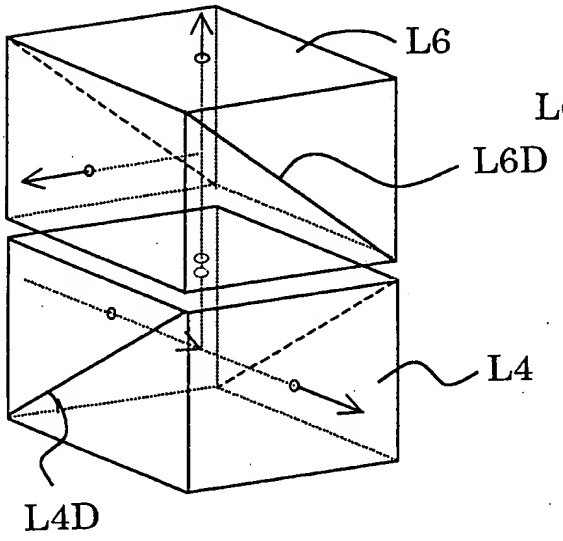

Fig. 2B (2A)

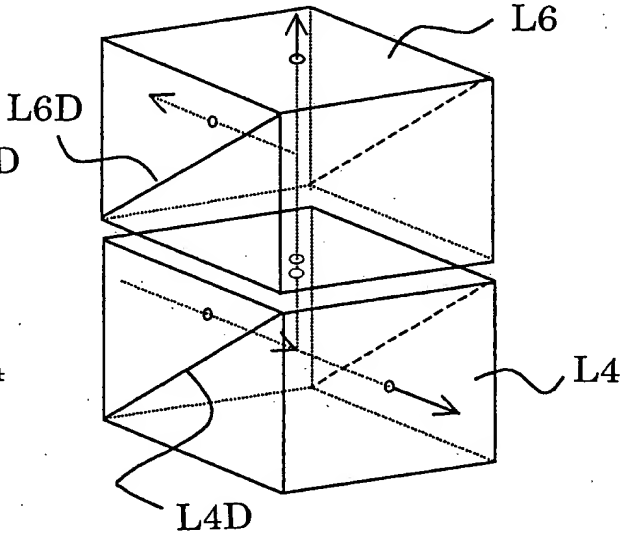

EP0804750A1